

DUOMAX^M

390-415W

出力範囲

20.2%

最大変換効率


0~+5W

出力許容公差





- フレーム付きデザインなので、従来の工法で架台への取付が可能
- 従来のフレーム付きモジュール同様、運搬の取扱が容易

トリナ・ソーラーの%60・"9出力保証

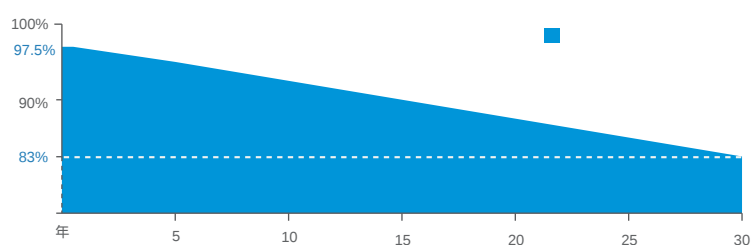

Trina solar



	o A ¥
	· Ç ·
	· · N N
	L H
	& 7 "
	* 1 "

	41 ¥ (±3 ¥)
	- 0.35%/ ¥
	- 0.25%/ ¥
	0.04%/ ¥

-40~+85 ¥
1500V DC (IEC)
1500V DC (UL)

