

DUOMAX^{tw}

390-410W

出力範囲

20.0%

最大変換効率

0~+5W

出力許容公差





従来通りの設置方法




- ◀ フレーム付きデザインなので、従来の工法で架台への取付が可能
- ◀ 従来のフレーム付きモジュール同様、運搬の取扱が容易


トリナ・ソーラーのDUOMAX出力保証

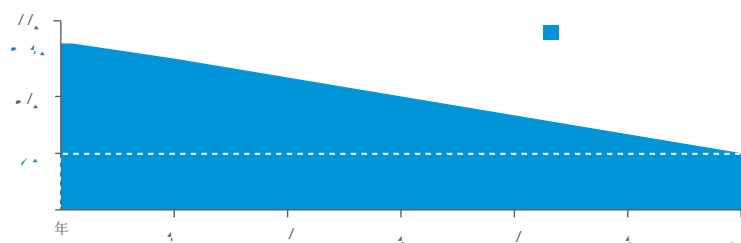

Trinasolar


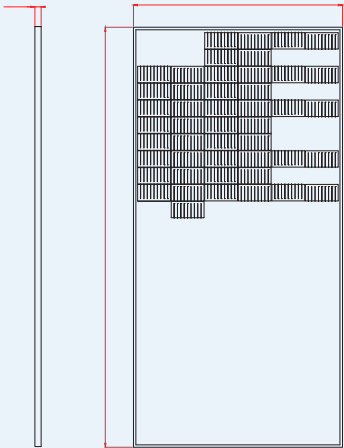


表面図

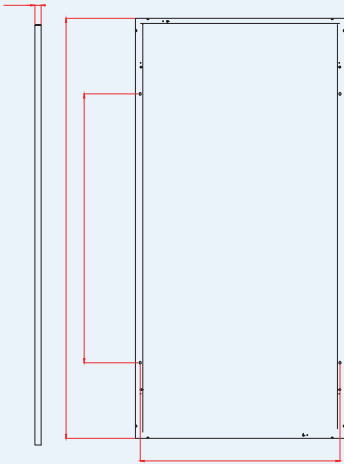

背面図

接地穴
水抜き穴

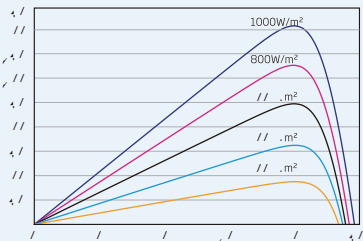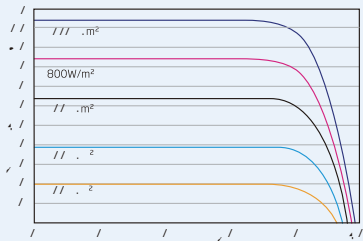

	1	2	3	4	5
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1
4	1	1	1	1	1
5	1	1	1	1	1

	1	2	3	4	5
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1
4	1	1	1	1	1
5	1	1	1	1	1

	1	2	3	4	5
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1
4	1	1	1	1	1
5	1	1	1	1	1

	単結晶
	144 セル (6 × 24)
	2031 × 1011 × 30mm
	26.8 kg
	POE/EVA

	1	2	3	4	5
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1

	1	2	3	4	5
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1

	1	2	3	4	5
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1

	1	2	3	4	5
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1