

# DUOMAX

**340-355W**


出力範囲

**17.3%**

最大変換効率


**0~+5W**

出力許容公差

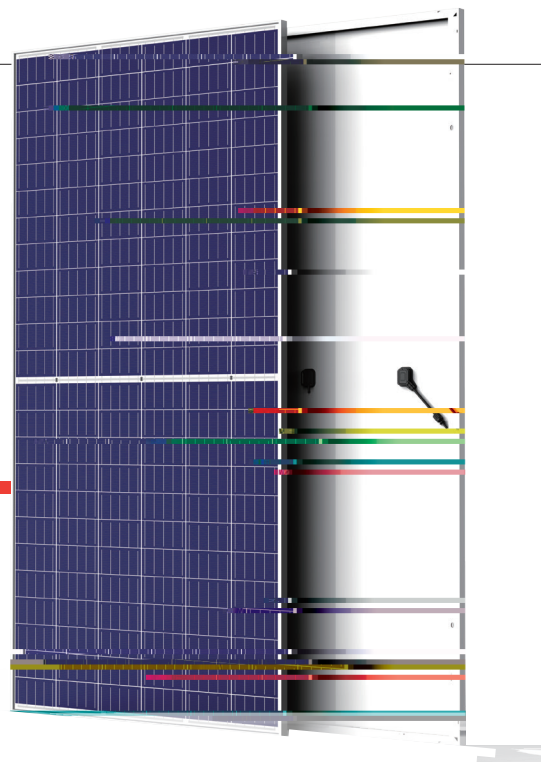

- フレーム付きデザインなので、従来の工法で架台への取付が可能
- 従来のフレーム付きモジュール同様、運搬の取扱が容易

トリナ・ソーラーのDUOMAX出力保証

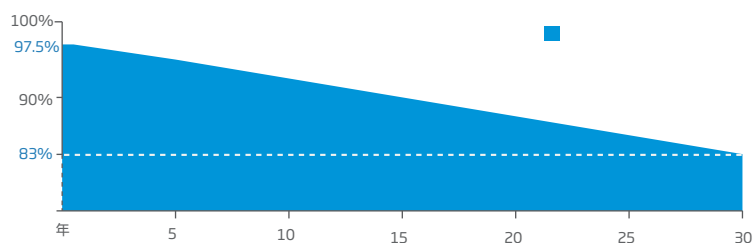

**Trina**solar

|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |

|  |                     |
|--|---------------------|
|  | 多結晶                 |
|  | 144 セル (6 × 24)     |
|  | 2031 × 1011 × 30 mm |
|  | 26.8 kg             |
|  |                     |
|  | EVA                 |
|  |                     |
|  |                     |
|  |                     |
|  |                     |
|  |                     |

|  |             |
|--|-------------|
|  | 41°C (±3°C) |
|  | - 0.38%/°C  |
|  | - 0.31%/°C  |
|  | 0.05%/°C    |

|  |                |
|--|----------------|
|  | -40~+85°C      |
|  | 1500V DC (IEC) |
|  | 1500V DC (UL)  |
|  | 20A            |

|  |  |
|--|--|
|  |  |
|  |  |

|  |  |
|--|--|
|  |  |
|  |  |